


DUPLICATE ORIGINAL

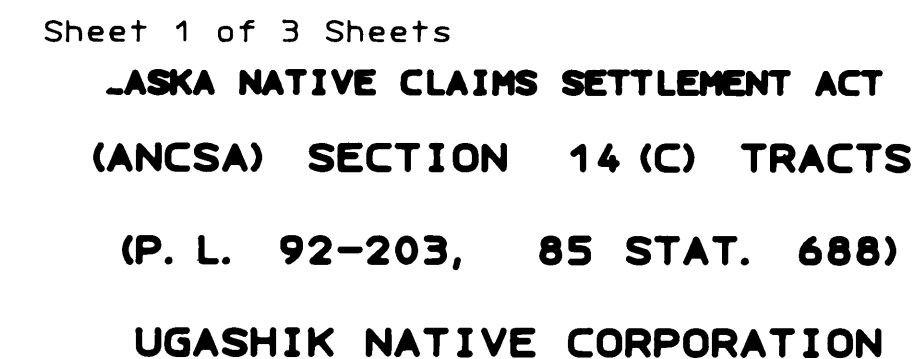

UGASHIK, ALASKA

This plat contains the entire survey record.

The exterior boundaries of Township 31 South, Range 50 West, Seward Meridian, Alaska, were surveyed by Reed L. Terry and Robert A. Brown, Cadastral Surveyors, in 1975 through 1976.

U. S. Survey No. 1029 was surveyed by Alexander H. Bradford, U. S. Deputy Surveyor, in 1913.

U. S. Survey No. 4994 was surveyed by Warren P. Latvala, Cadastral Surveyor, in 1971.

U.S. Survey No. 7071 was surveyed by Richard D. Bradley, Cadastral Surveyor, in 1982.

U.S. Survey No. 8475 and U.S. Survey No. 8476 were surveyed by Charles E. Akin, Jr., Registered Alaska Land Surveyor No. LS-5131, in 1986.

This survey was executed by Charles E. Akin, Jr., Registered Alaska Land Surveyor No. LS-5131, September 9 through September 23, 1986, under Contract No. YA551-CT6-340079, dated August 6, 1986, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and Notice to Proceed dated August 27, 1986.

Field assistant was:
G. Robert Lecklider, Land Surveyor

Area: 1149.93 Acres.

The azimuth was obtained from line 1-2, U.S. Survey No. 1029, identical with line 5-4, U.S. Survey No. 4994, carried forward to this survey by sustained angulation, and refers to the true meridian.

The geographic position of corner No. 7, Lot 1, identical with corner No. 2, U.S. Survey 4994, as determined from the record tie shown on the plat for Township 31 South, Range 50 West, Seward Meridian, Alaska, is:

Latitude: 57° 31' 23.64" North
Longitude: 157° 23' 53.22" West

The magnetic declination was taken from U.S. Geological Survey quadrangle map "UGASHIK (C-5)," Alaska, 1951 edition, with minor revisions in 1973.

This survey is located adjacent to the village of Uqeshik, Alaska.

The land varies from rolling upland to level marsh, situated between the left bank of the Ugashik River and the northerly shore of Big Packers Lake, vegetated with willow, mosses, native grasses and berry plants.

The soil varies from sandy loam in the upland to musked in the marshy areas.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

Lance P. Erickson 22 JAN. 1987
Date
Deputy State Director for Cadastral Survey,
Alaska.

(P. L. 92-203, 85 STAT. 688)

UGASHIK NATIVE CORPORATION

UGASHIK, ALASKA

This plat contains the entire survey record.

The exterior boundaries of Township 31 South, Range 50 West, Seward Meridian, Alaska, were surveyed by Reed L. Terry and Robert A. Brown, Cadastral Surveyors, in 1975 through 1976.

U. S. Survey No. 1029 was surveyed by Alexander H. Bradford, U. S. Deputy Surveyor, in 1913.

U.S. Survey No. 4994 was surveyed by Warren P. Latvala, Cadastral Surveyor, in 1971.

U.S. Survey No. 7071 was surveyed by Richard D. Bradley, Cadastral Surveyor, in 1982.

U.S. Survey No. 8475 and U.S. Survey No. 8476 were surveyed by Charles E. Akin, Jr., Registered Alaska Land Surveyor No. LS-5131, in 1986.

This survey was executed by Charles E. Akin, Jr., Registered Alaska Land Surveyor No. LS-5131, September 9 through September 23, 1986, under Contract No. YA551-CT6-340079, dated August 6, 1986, in accordance with the specifications set forth in the Manual of Surveying Instructions, 1973, and Notice to Proceed dated August 27, 1986.

Field assistant was:
G. Robert Lecklider, Land Surveyor

Area: 1149.93 Acres.

The azimuth was obtained from line 1-2, U.S. Survey No. 1029, identical with line 5-4, U.S. Survey No. 4994, carried forward to this survey by sustained angulation, and refers to the true meridian.

The geographic position of corner No. 7, Lot 1, identical with corner No. 2, U.S. Survey 4994, as determined from the record tie shown on the plat for Township 31 South, Range 50 West, Seward Meridian, Alaska, is:

Latitude: 57° 31' 23.64" North
Longitude: 157° 23' 53.22" West

The magnetic declination was taken from U.S. Geological Survey quadrangle map "UGASHIK (C-5)," Alaska, 1951 edition, with minor revisions in 1973.

This survey is located adjacent to the village of Uqashik, Alaska.

The land varies from rolling upland to level marsh, situated between the left bank of the Ugashik River and the northerly shore of Big Packers Lake, vegetated with willow, mosses, native grasses and berry plants.

The soil varies from sandy loam in the upland to muskeg in the marshy areas.

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska


The survey represented by this plat, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

Francis D. Rickbush

22 JAN. 1987
Date

Deputy State Director for Cadastral Survey,
Alaska.

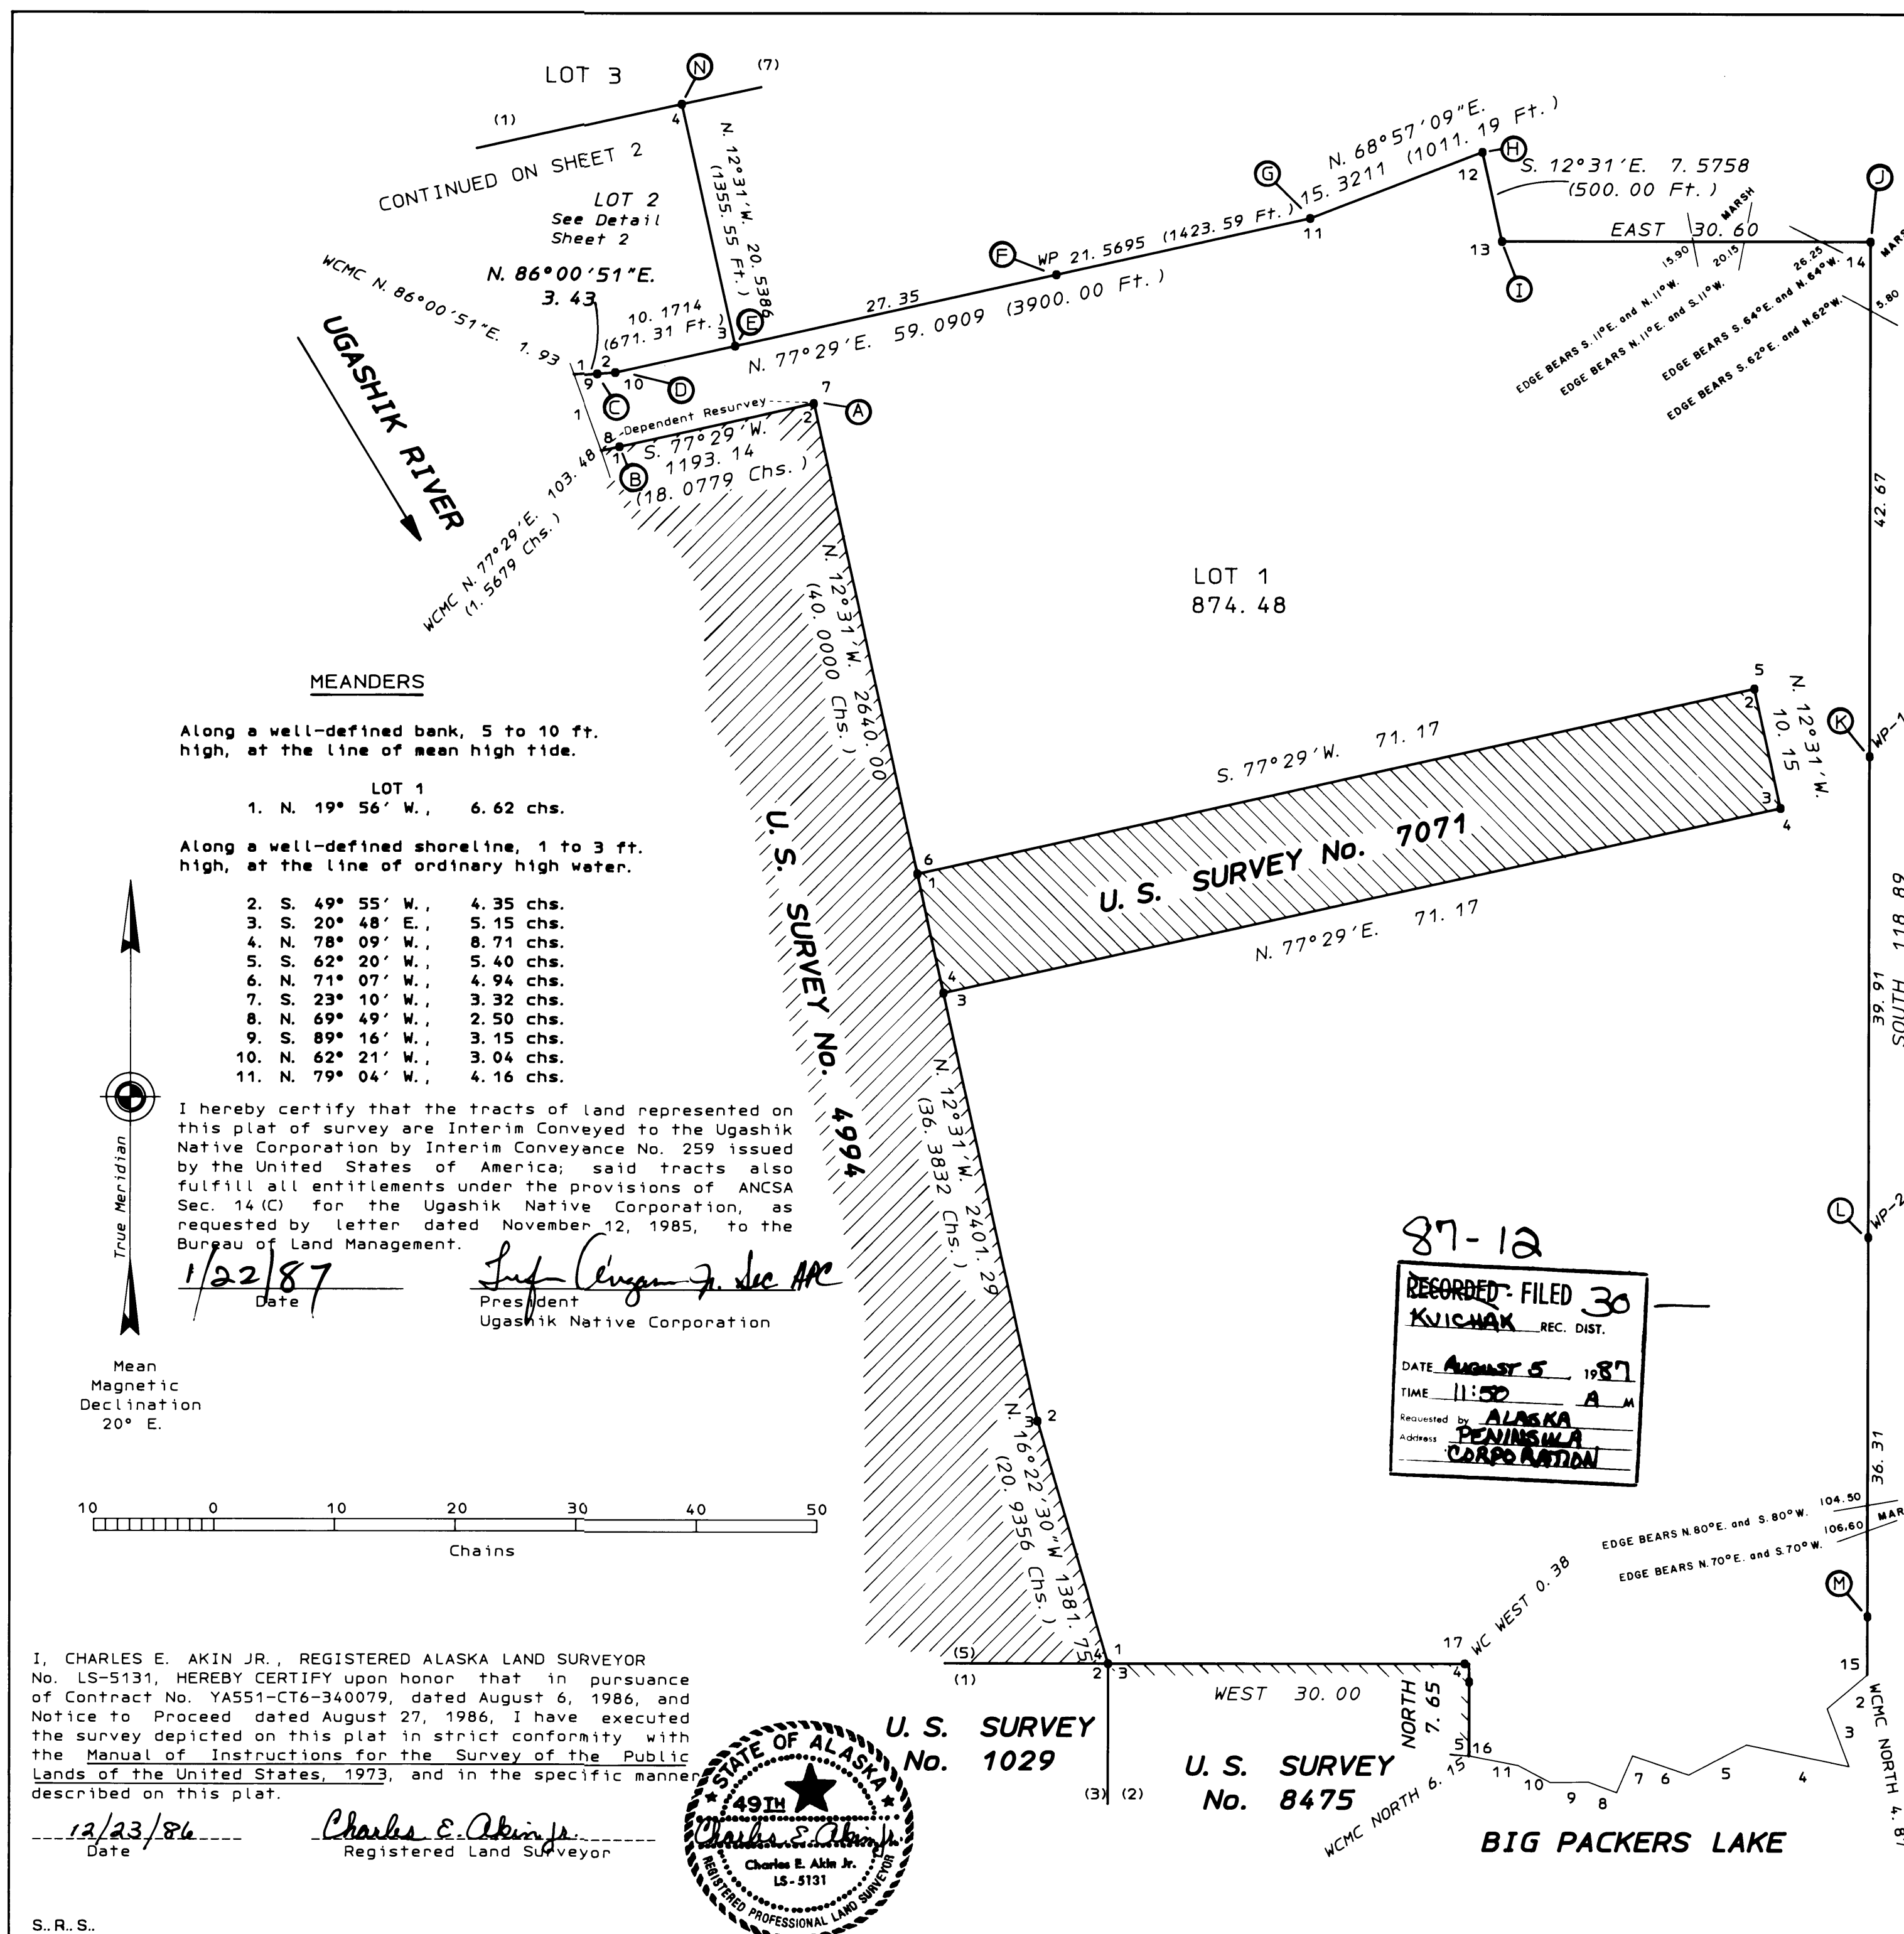

DUPLICATE ORIGINAL

UGASHIK, ALASKA

88-14


RECORDED - FILED 30-
KULICHAK REC. DIST. 62
DATE 12-7 1988
TIME 1:00 P M
Kind mailed by USA/BLM
Address

No accessories.

87-12

RECORDED - FILED 30
KVIC MAK REC. DIST.
DATE AUGUST 5, 19 87
TIME 11:50 A.M.
Requested by ALASKA
Address DENY/INSELA
CORPORATIONAL

Deputy State Director for Cadastral Survey,
Alaska.

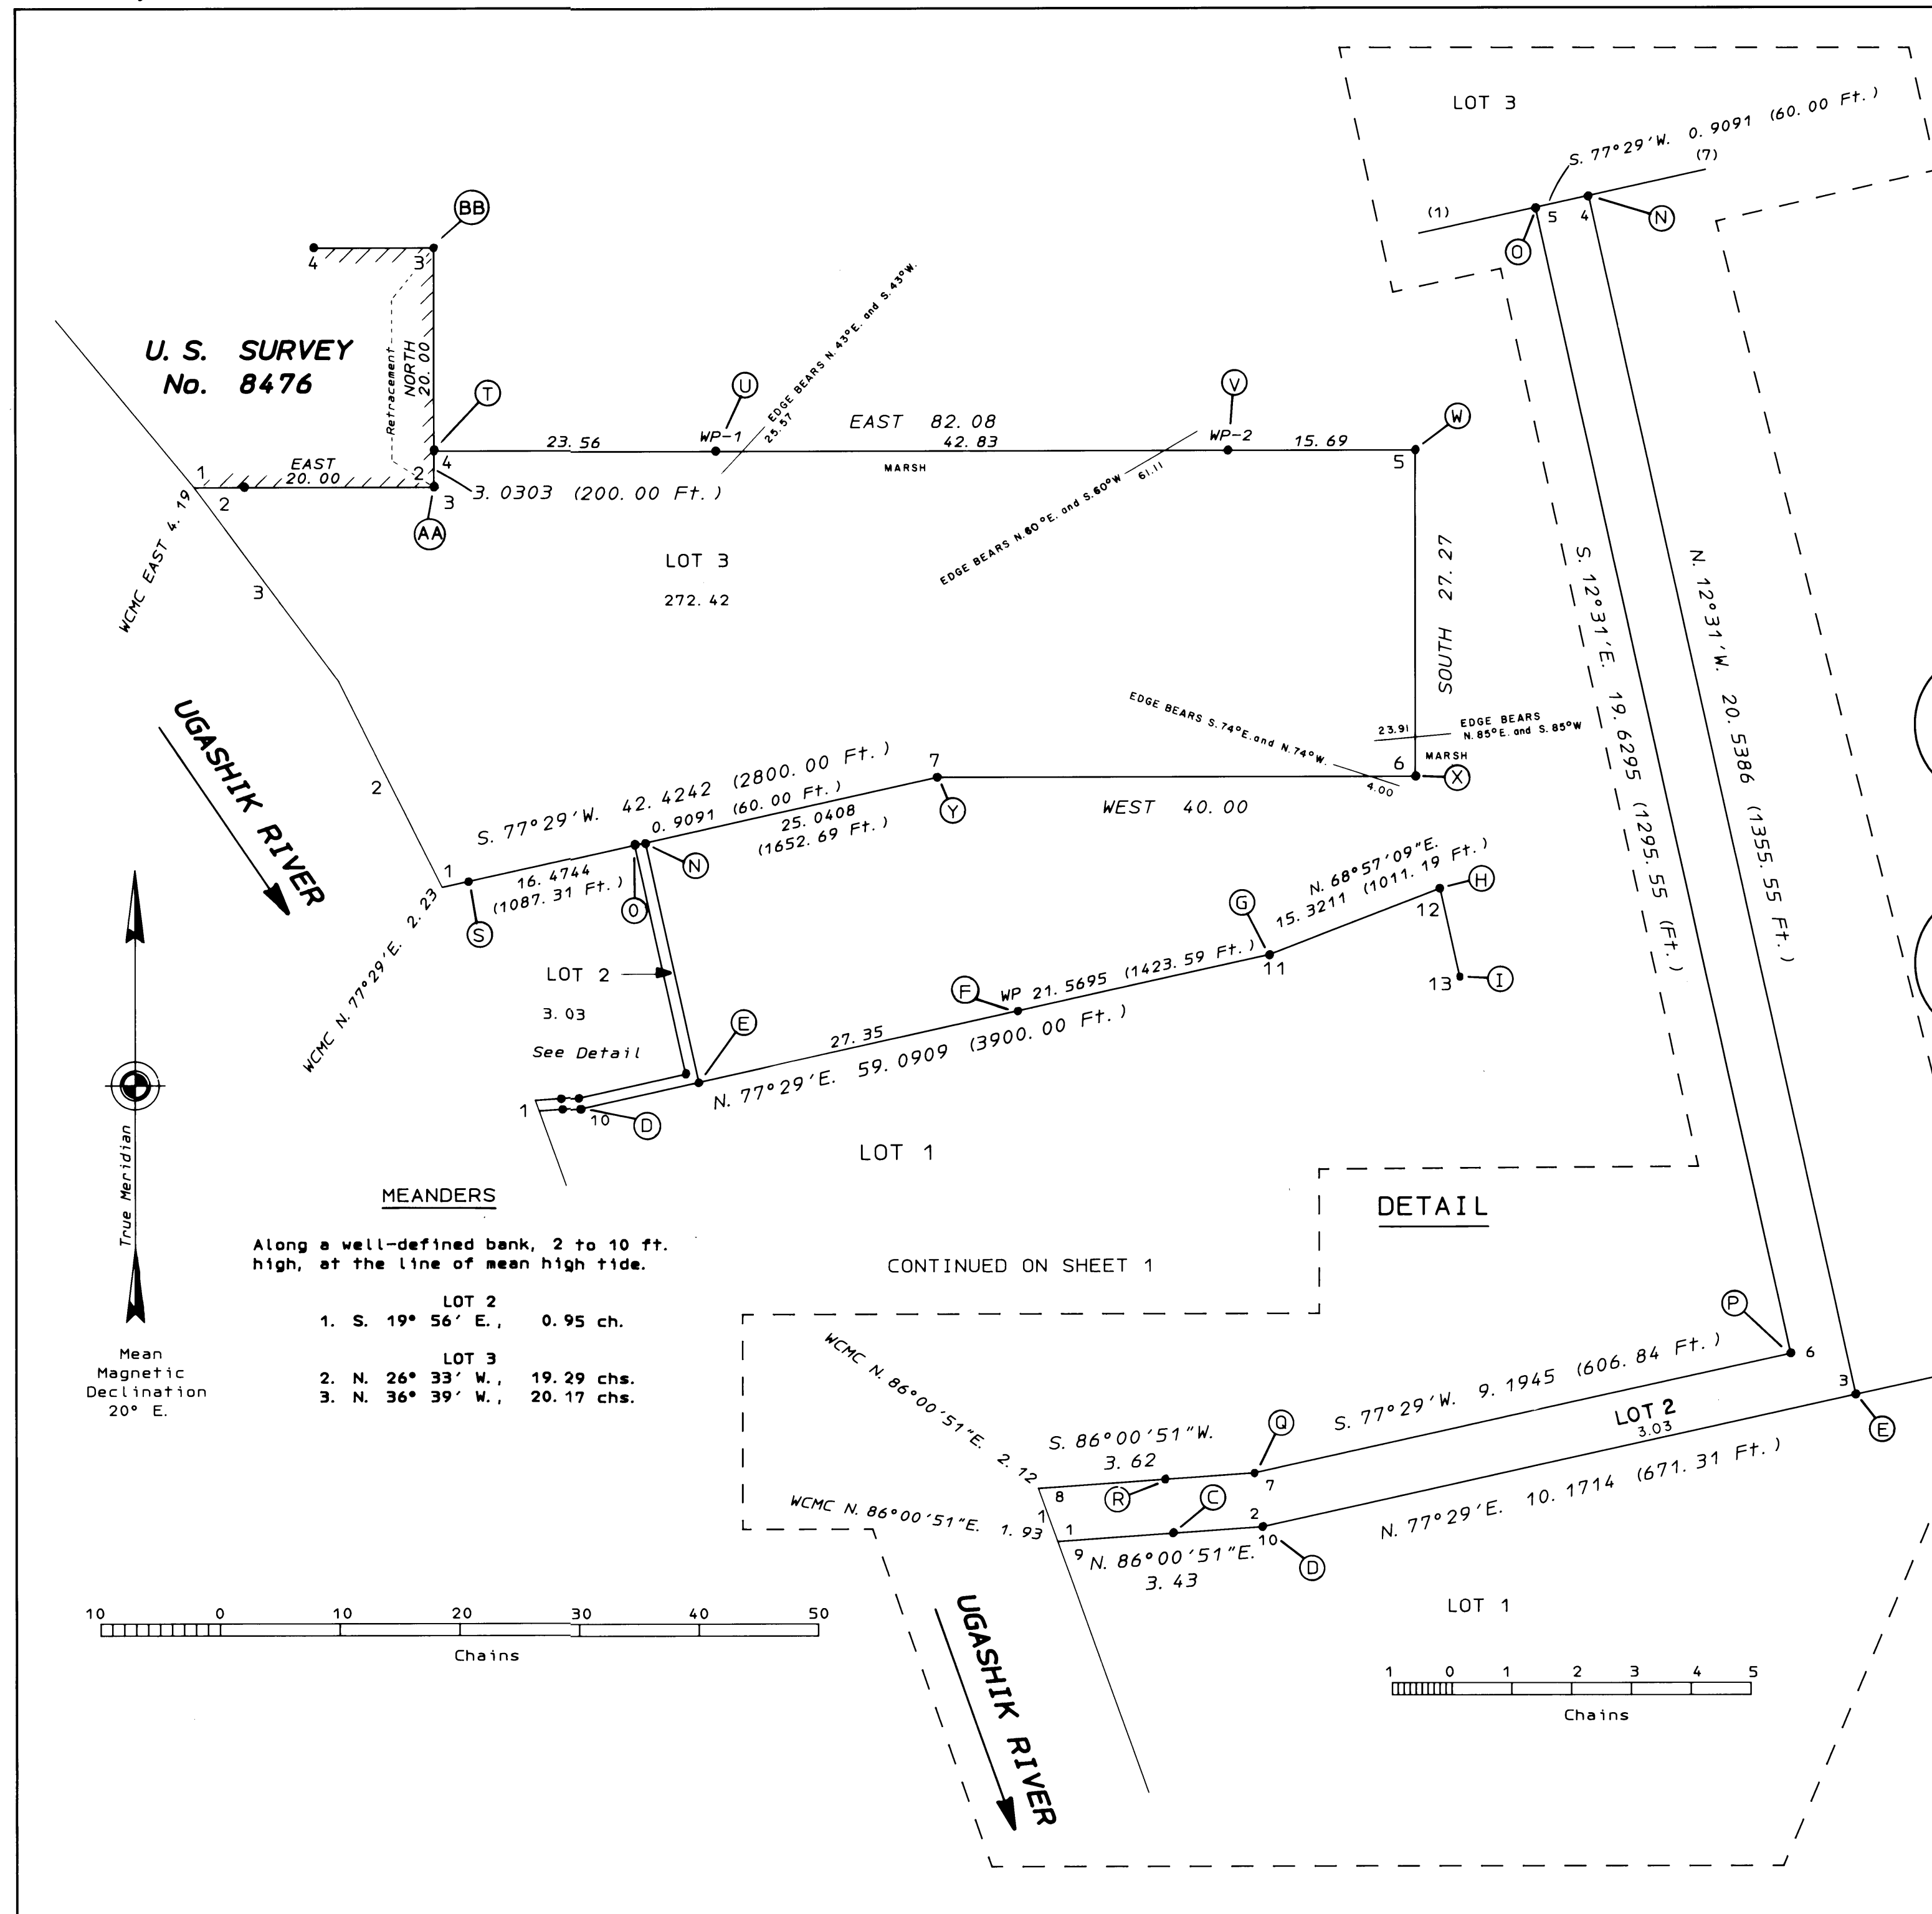

The reference to the Ugashik Native Corporation is in error. The correct name of the corporation is the Alaska Peninsula Corporation. Refer to memo 9640 (922) Ugashik 14 (c) Alaska, dated Nov. 14, 1988 for authority to make this annotation.

DUPLICATE ORIGINAL

NOTE

All corners of this survey not described below and depicted on this plat are corners of record and are hereby designated as shown on sheets 1 and 2, with no marks added.

Sheet 3 OF 3 Sheets


ALASKA NATIVE CLAIMS SETTLEMENT ACT

(ANCSA) SECTION 14 (C) TRACTS

(P. L. 92-203, 85 STAT. 688)


UGASHIK NATIVE CORPORATION

UGASHIK, ALASKA




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap marked as shown.

No accessories.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.5 ft. in the ground, with alum. cap marked as shown.

Drive an alum. rod, 9 ft. long, 3/4 in. diam., 7.5 ft. in the ground, 5 lks. East of the corner, with an orange triangular marker on the top.




Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

Drive an alum. rod, 9 ft. long, 3/4 in. diam., 7.5 ft. in the ground, 5 lks. East of the corner, with an orange triangular marker on the top.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.




Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, and in a collar of stone, with alum. cap marked as shown.

No suitable accessories available, pits impractical.



Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.5 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.



Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

No suitable accessories available, pits impractical.

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska



The survey represented by this plat, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

James R. Smith


22 JAN. 1987
Date

Deputy State Director for Cadastral Survey,
Alaska.

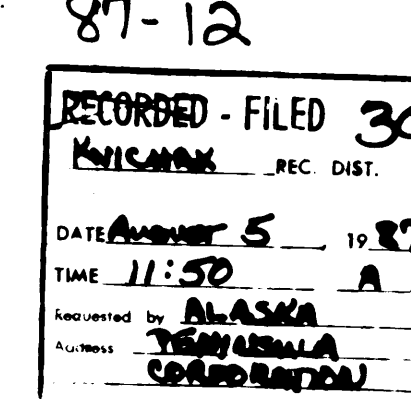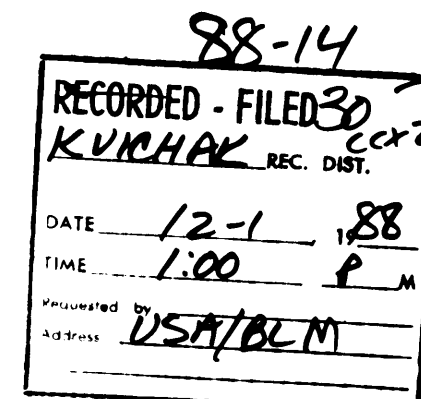


NOTE
All corners of this survey not described below and depicted on this plat are corners of record and are hereby designated as shown on sheets 1 and 2, with no marks added.


Sheet 3 OF 3 Sheets
ALASKA NATIVE CLAIMS SETTLEMENT ACT
(ANCSA) SECTION 14 (C) TRACTS
(P. L. 92-203, 85 STAT. 688)
UGASHIK NATIVE CORPORATION
UGASHIK, ALASKA




Recovered an iron post, 2 1/2 ins. diam., firmly set, projecting 4 ins. above the ground, with brass cap marked as shown.
No accessories.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 28 ins. in the ground, with alum. cap marked as shown.
No suitable accessories available, pits impractical.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.5 ft. in the ground, with alum. cap marked as shown.
Drive an alum. rod, 9 ft. long, 3/4 in. diam., 7.5 ft. in the ground, 5 lks. East of the corner, with an orange triangular marker on the top.




Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.




Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.



Set an alum. post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, and in a collar of stone, with alum. cap marked as shown.



Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.5 ft. in the ground, with alum. cap marked as shown.



Drive an alum. rod, 9 ft. long, 3/4 in. diam., 8.0 ft. in the ground, with alum. cap marked as shown.

REFERENCE SHOULD BE MADE TO SHEET NO. 1 FOR SURVEY INFORMATION

UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Anchorage, Alaska

The survey represented by this plat, having been correctly executed in accordance with the requirements of law and the regulations of this Bureau, is hereby accepted.

For the Director

Fanni J. K. K.

22 JAN. 1987
Date

Deputy State Director for Cadastral Survey,
Alaska.

87-12

RECORDED - FILED	30
KUCANA	REC. DIST.
DATE	AUGUST 5, 1987
TIME	11:15 A.M.
Requested by	ALASKA
Address	YAKUTSK
	CORPORATION